

Heritage flush sash looks great in any surrounding; modern townhouse or country cottage, its subtle charm and elegance transforms the building like no other.

With its flush external contours, something considered more in keeping on period

properties, satisfying the requirements of your local conservation officer just got a whole lot easier, especially when you add the all important Georgian bar for that archetypal chocolate box house you've always dreamed of.



Deceuninck Limited

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

 $deceuninck. Itd@deceuninck.com \\ \bullet \\ www.deceuninck.co.uk$

September 2016

Document No: 82130 – 8104 Heritage Flush Sash

Weather Performance

Internally we've adopted our tried and tested high performance multifunctional weatherseal. With a continuous seal welded at the corners, air tightness is always maintained meaning no loss of comfort inside the home.

Externally a new dual seal combination maximises water tightness and conceals hardware.


An integral drainage slope encourages water to drain away quickly and easily.

Security

The Deceuninck flush sash had the homeowner in mind during its design, so unlike others there's no compromise when it comes to things like having a night vent locking position. The bespoke locking keep also means full hardware compatibility, giving the window unrivalled security for a product of this type... achieving PAS24 just got a whole lot easier.

Insulation

With its core designed around Heritage 2800, the insulating properties of flush sash are even more impressive. A double glazed window U value of just 1.2 epitomises this market leading product.

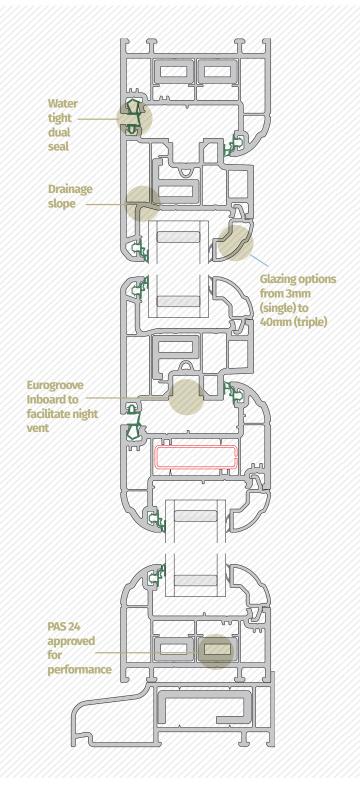




Weather test results

		Top Hung Casement	Side Hung Casement	
	Size Tested	1.2m x 1.2m	0.7m x 1.4m	
Air Permeability	Class	A4	A4	
	Rating	600 Pa	600 Pa	
Water tightness	Class	E900	E900	
	Rating	900 Pa	900 Pa	
Wind Resistance	Class	A5 (TCI) AE (Steel)	A5 (TCI) AE (Steel)	
	Rating	1600 (TCI) 2400 (Steel)	1600 (TCI) 2400 (Steel)	





U-Values

41	20	14	Argo	n n	Cav	itv
+ /	201	_	$\Delta I \leq I$	<i>י</i> ווע	Cuv	ILV

4/14/4/14/4 Argon Cavity

U _g 1.219	U _g 1.070
U _w 1.4	U _w 1.2

U _g 0.683	U _g 0.591
U _w 0.97	U _w 0.90


WER's

4/20/4 Argon Cavity

4/14/4/14/4 Argon Cavity

A+ 11

A++ 23





Deceuninck Limited

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

 $deceuninck.ltd@deceuninck.com \bullet www.deceuninck.co.uk$

September 2016

Document No: 82130 – 8104 Heritage Flush Sash

Heritage Flush Sash | www.deceuninck.co.uk



Colour Express

A unique range of foil colours in 18 colourways from stock, complete with matching ancillaries, trims and accessories.

- · Beautiful authentic 'wood like' finish
- Extremely durable
- 10 year manufacturer's guarantee



Grev

Heritage Collection

Our new range of premium woodgrain foils in eight colourways from stock. Each colour has its own matching ancillaries, trims and accessories.

- · Beautiful authentic 'wood like' finish
- Extremely durable
- 10 year manufacturer's guarantee





















Tree

Deceuninck Limited

Ash

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

deceuninck.ltd@deceuninck.co.uk

Document No: 82130 – 8104 Heritage Flush Sash